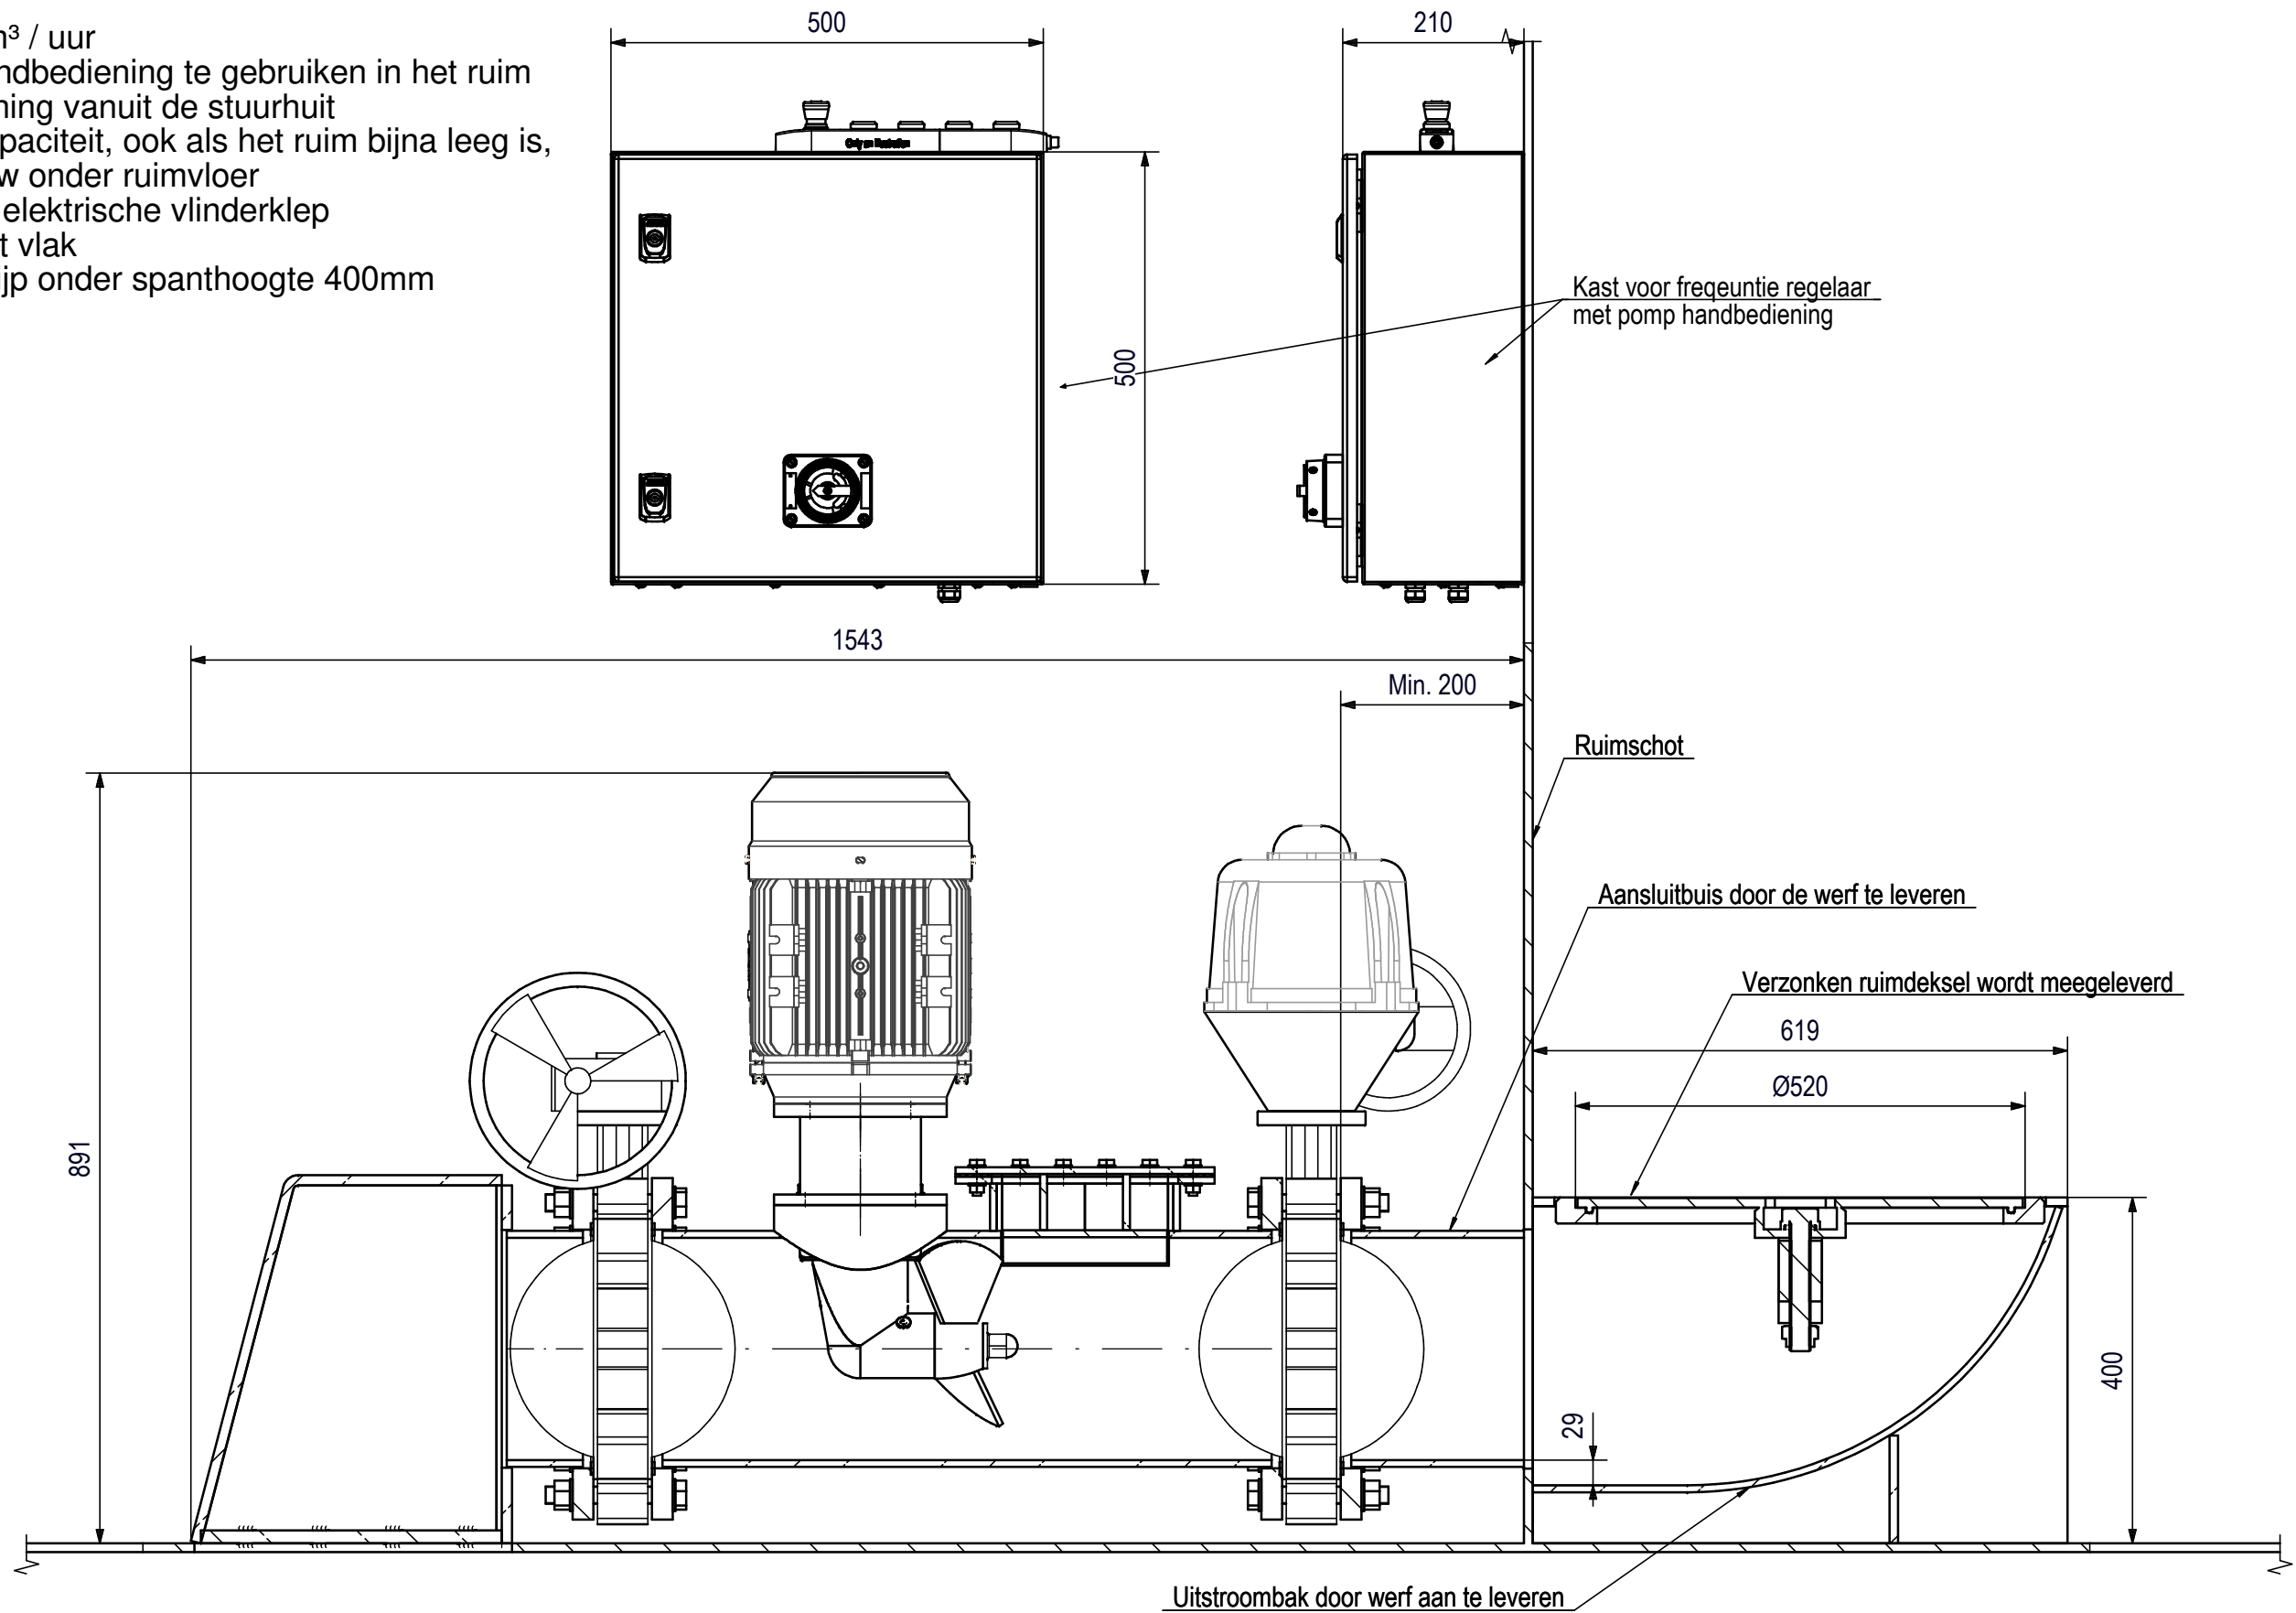


BALLASTPOMP TYPE PTD H250-7,5-10


- Capaciteit 650 m³ / uur
- Standaard afstandbediening te gebruiken in het ruim
- Optioneel bediening vanuit de stuurhut
- Hoge aanzuigcapaciteit, ook als het ruim bijna leeg is, door lage inbouw onder ruimvloer
- Handbediend of elektrische vlinderklep
- Vuilrooster in het vlak
- Inbouwhoogte pijp onder spanhoogte 400mm





	Grevelingenweg 23 3313 LB Dordrecht The Netherlands	Email: info@degrootmarine.com Phone: +31-3039700 Website: www.degrootmarine.com	Execution class: N/A	Dimensions tolerances: According ISO 2768-1
	3rd angle projection 	Overall scale: 1:8 Dimension unit: mm Layout format: A3	Signed by: J. Ippel 24-11-22 Approved by: Approved by:	Rev. A By: Jlp Date: 24-11-22 Revision comment: First issues
General notes:				Drawing status: Only for information Project: Drawingnr.: 35745001 Vesel: Drawingsht.: 1 of 4

BALLASTPOMP TYPE PTD H250-7,5-10


- Capacity 650 m³ / hour
- Standard remote control to be used in the hold
- Optional control from the wheelhouse
- High suction capacity, even when the hold is almost empty, due to low installation under the hold floor
- Manual or electric butterfly valve
- Dirt grille in the bottom suctionbox
- Pipe installation height under truss height 400mm

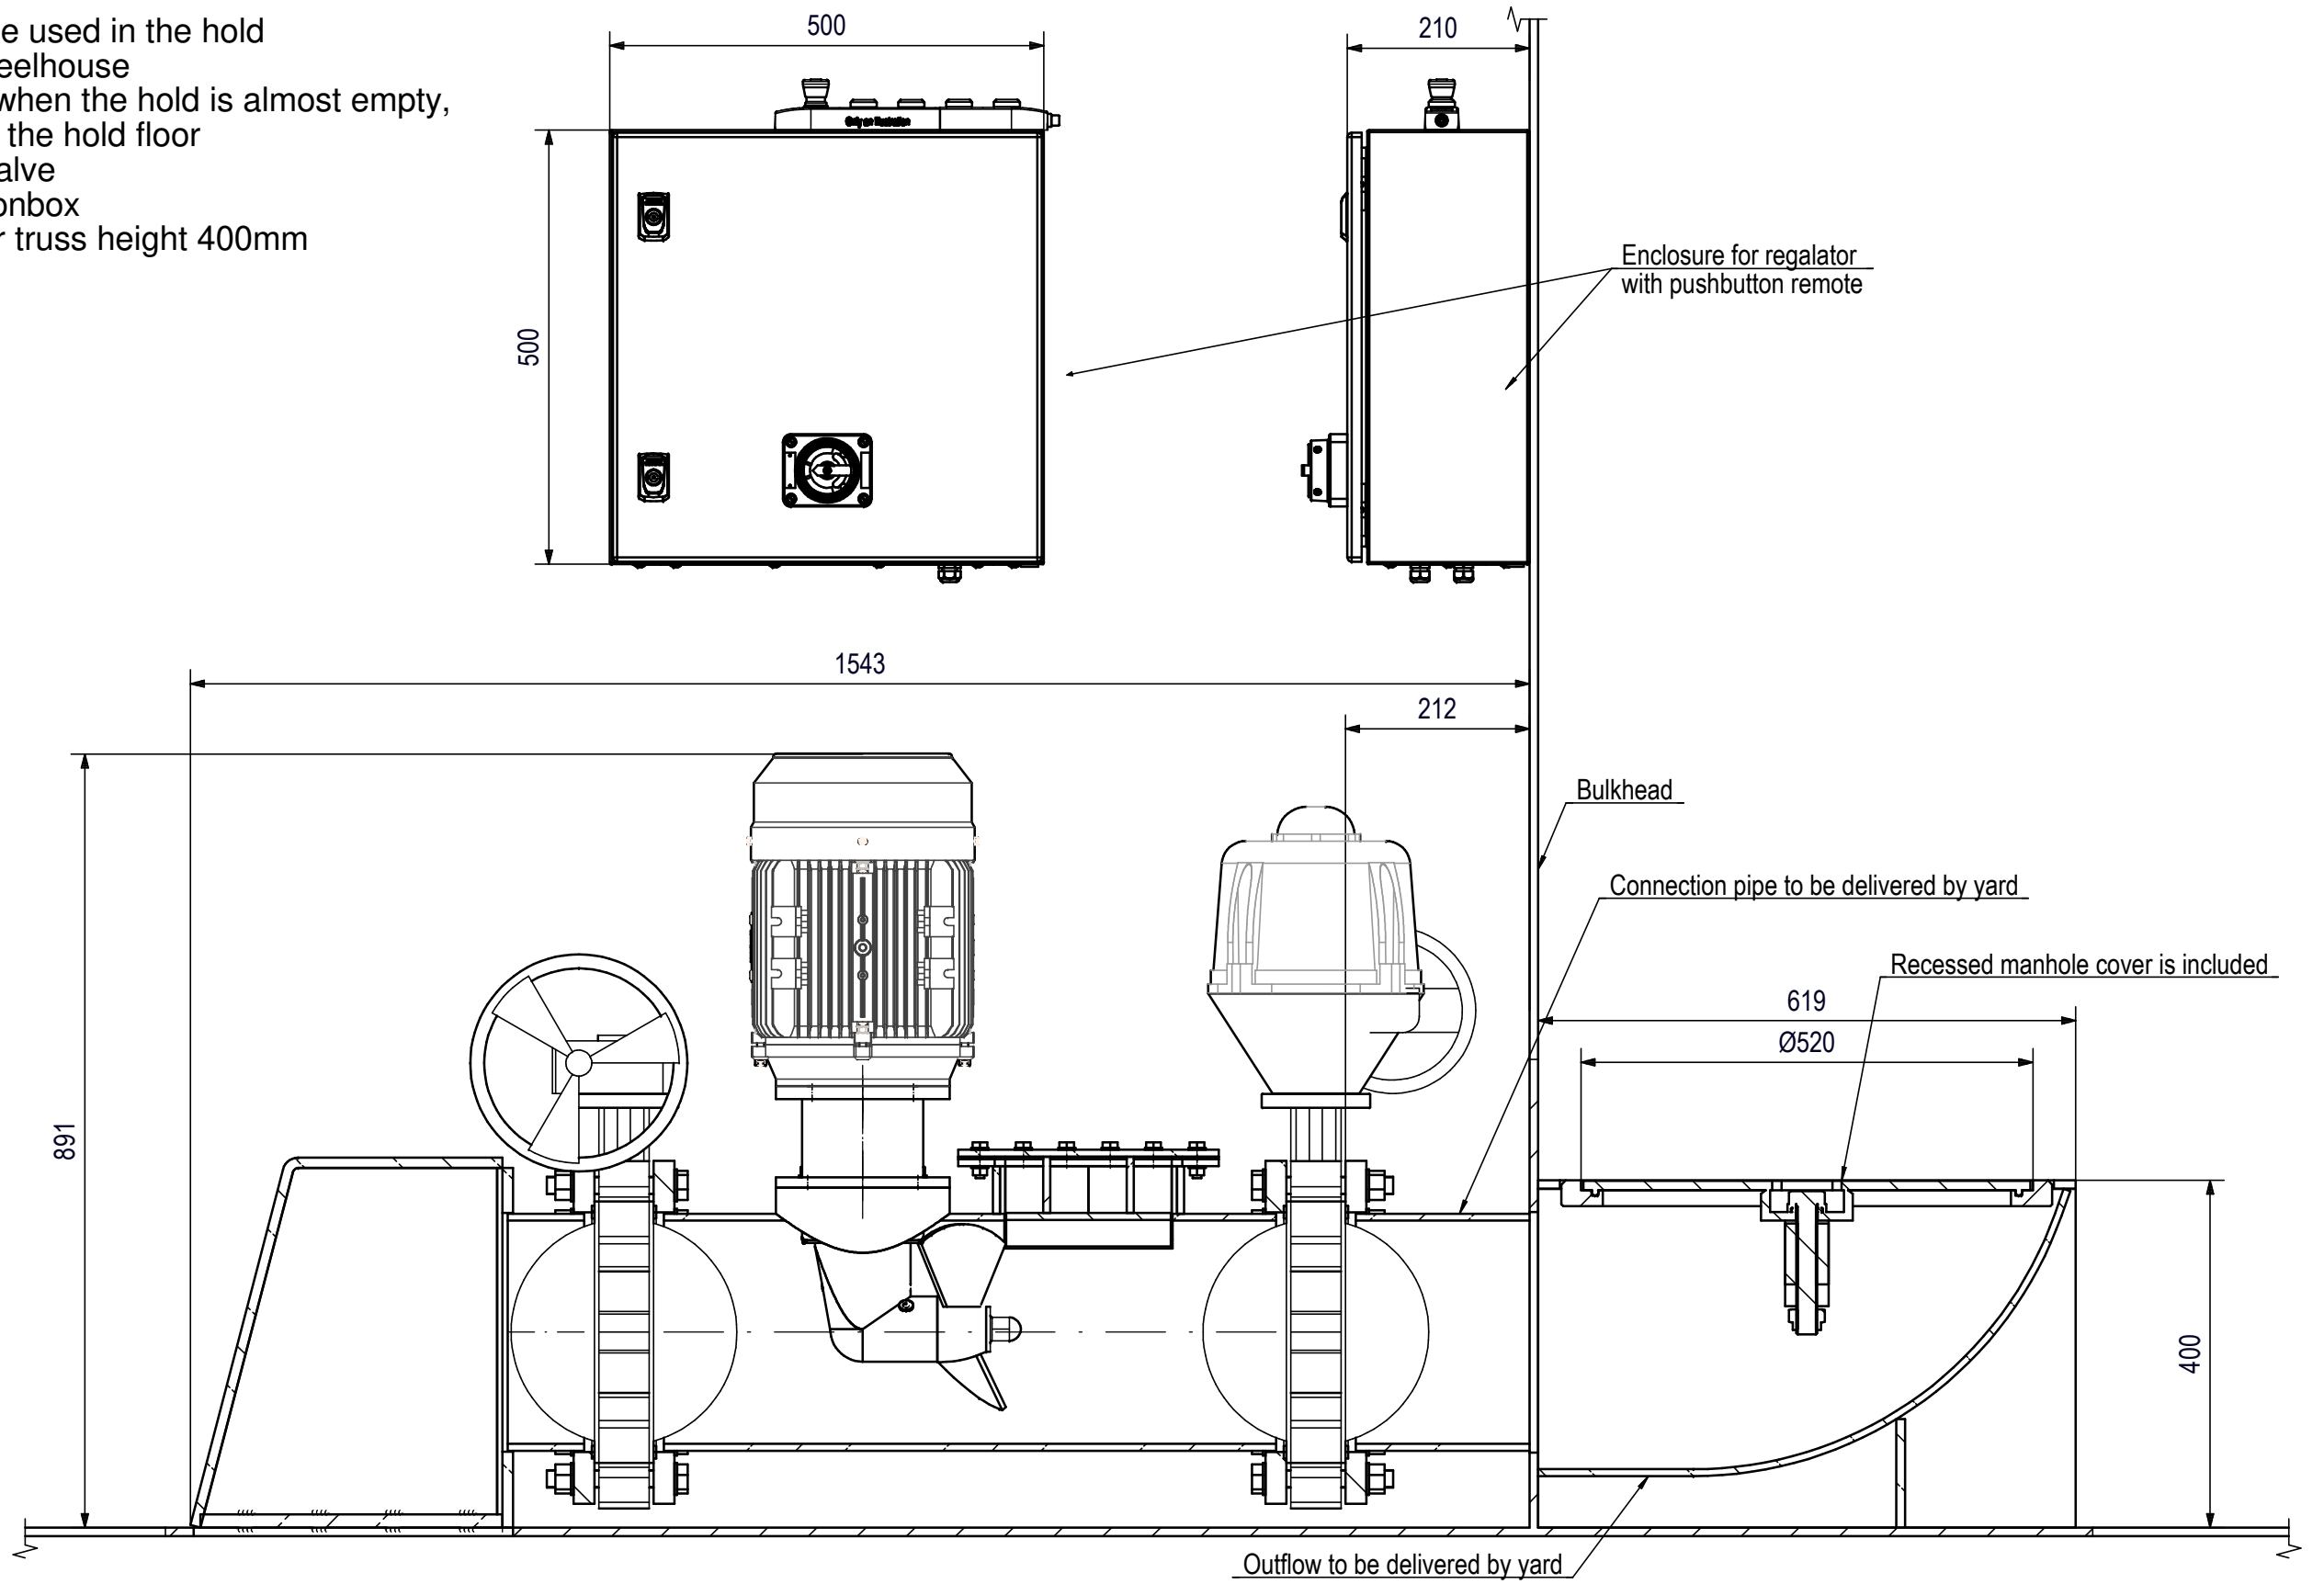

 DIESEL MARINE SERVICES DE GROOT	Grevelingenweg 23 3313 LB Dordrecht The Netherlands	Email: info@degrootmarine.com Phone: +31-3039700 Website: www.degrootmarine.com	Execution class: N/A	Dimensions tolerances: According ISO 2768-1
	3rd angle projection 	Overall scale: 1:8 Dimension unit: mm Layout format: A3	Signed by: J. Ippel 24-11-22 Approved by: Approved by:	Rev. A By: Jlp Date: 24-11-22 Revision comment: First issues
General notes:				Drawing status: Only for information Project: Drawingnr.: 35745001 Vessel: Drawingsht.: 2 of 4

BALLASTPOMP TYPE PTD H250-7,5-10

- Kapazität 650 m³ / Stunde
- Standardfernbedienung zur Verwendung im Laderaum
- Optionale Bedienung vom Steuerhaus aus
- Hohe Saugleistung, auch bei fast leerem Laderaum, durch niedrigen Einbau unter dem Laderaumboden
- Manuelle oder elektrische Absperrklappe
- Schmutzgitter in der Oberfläche
- Rohreinbauhöhe unter der Traversenhöhe 400 mm

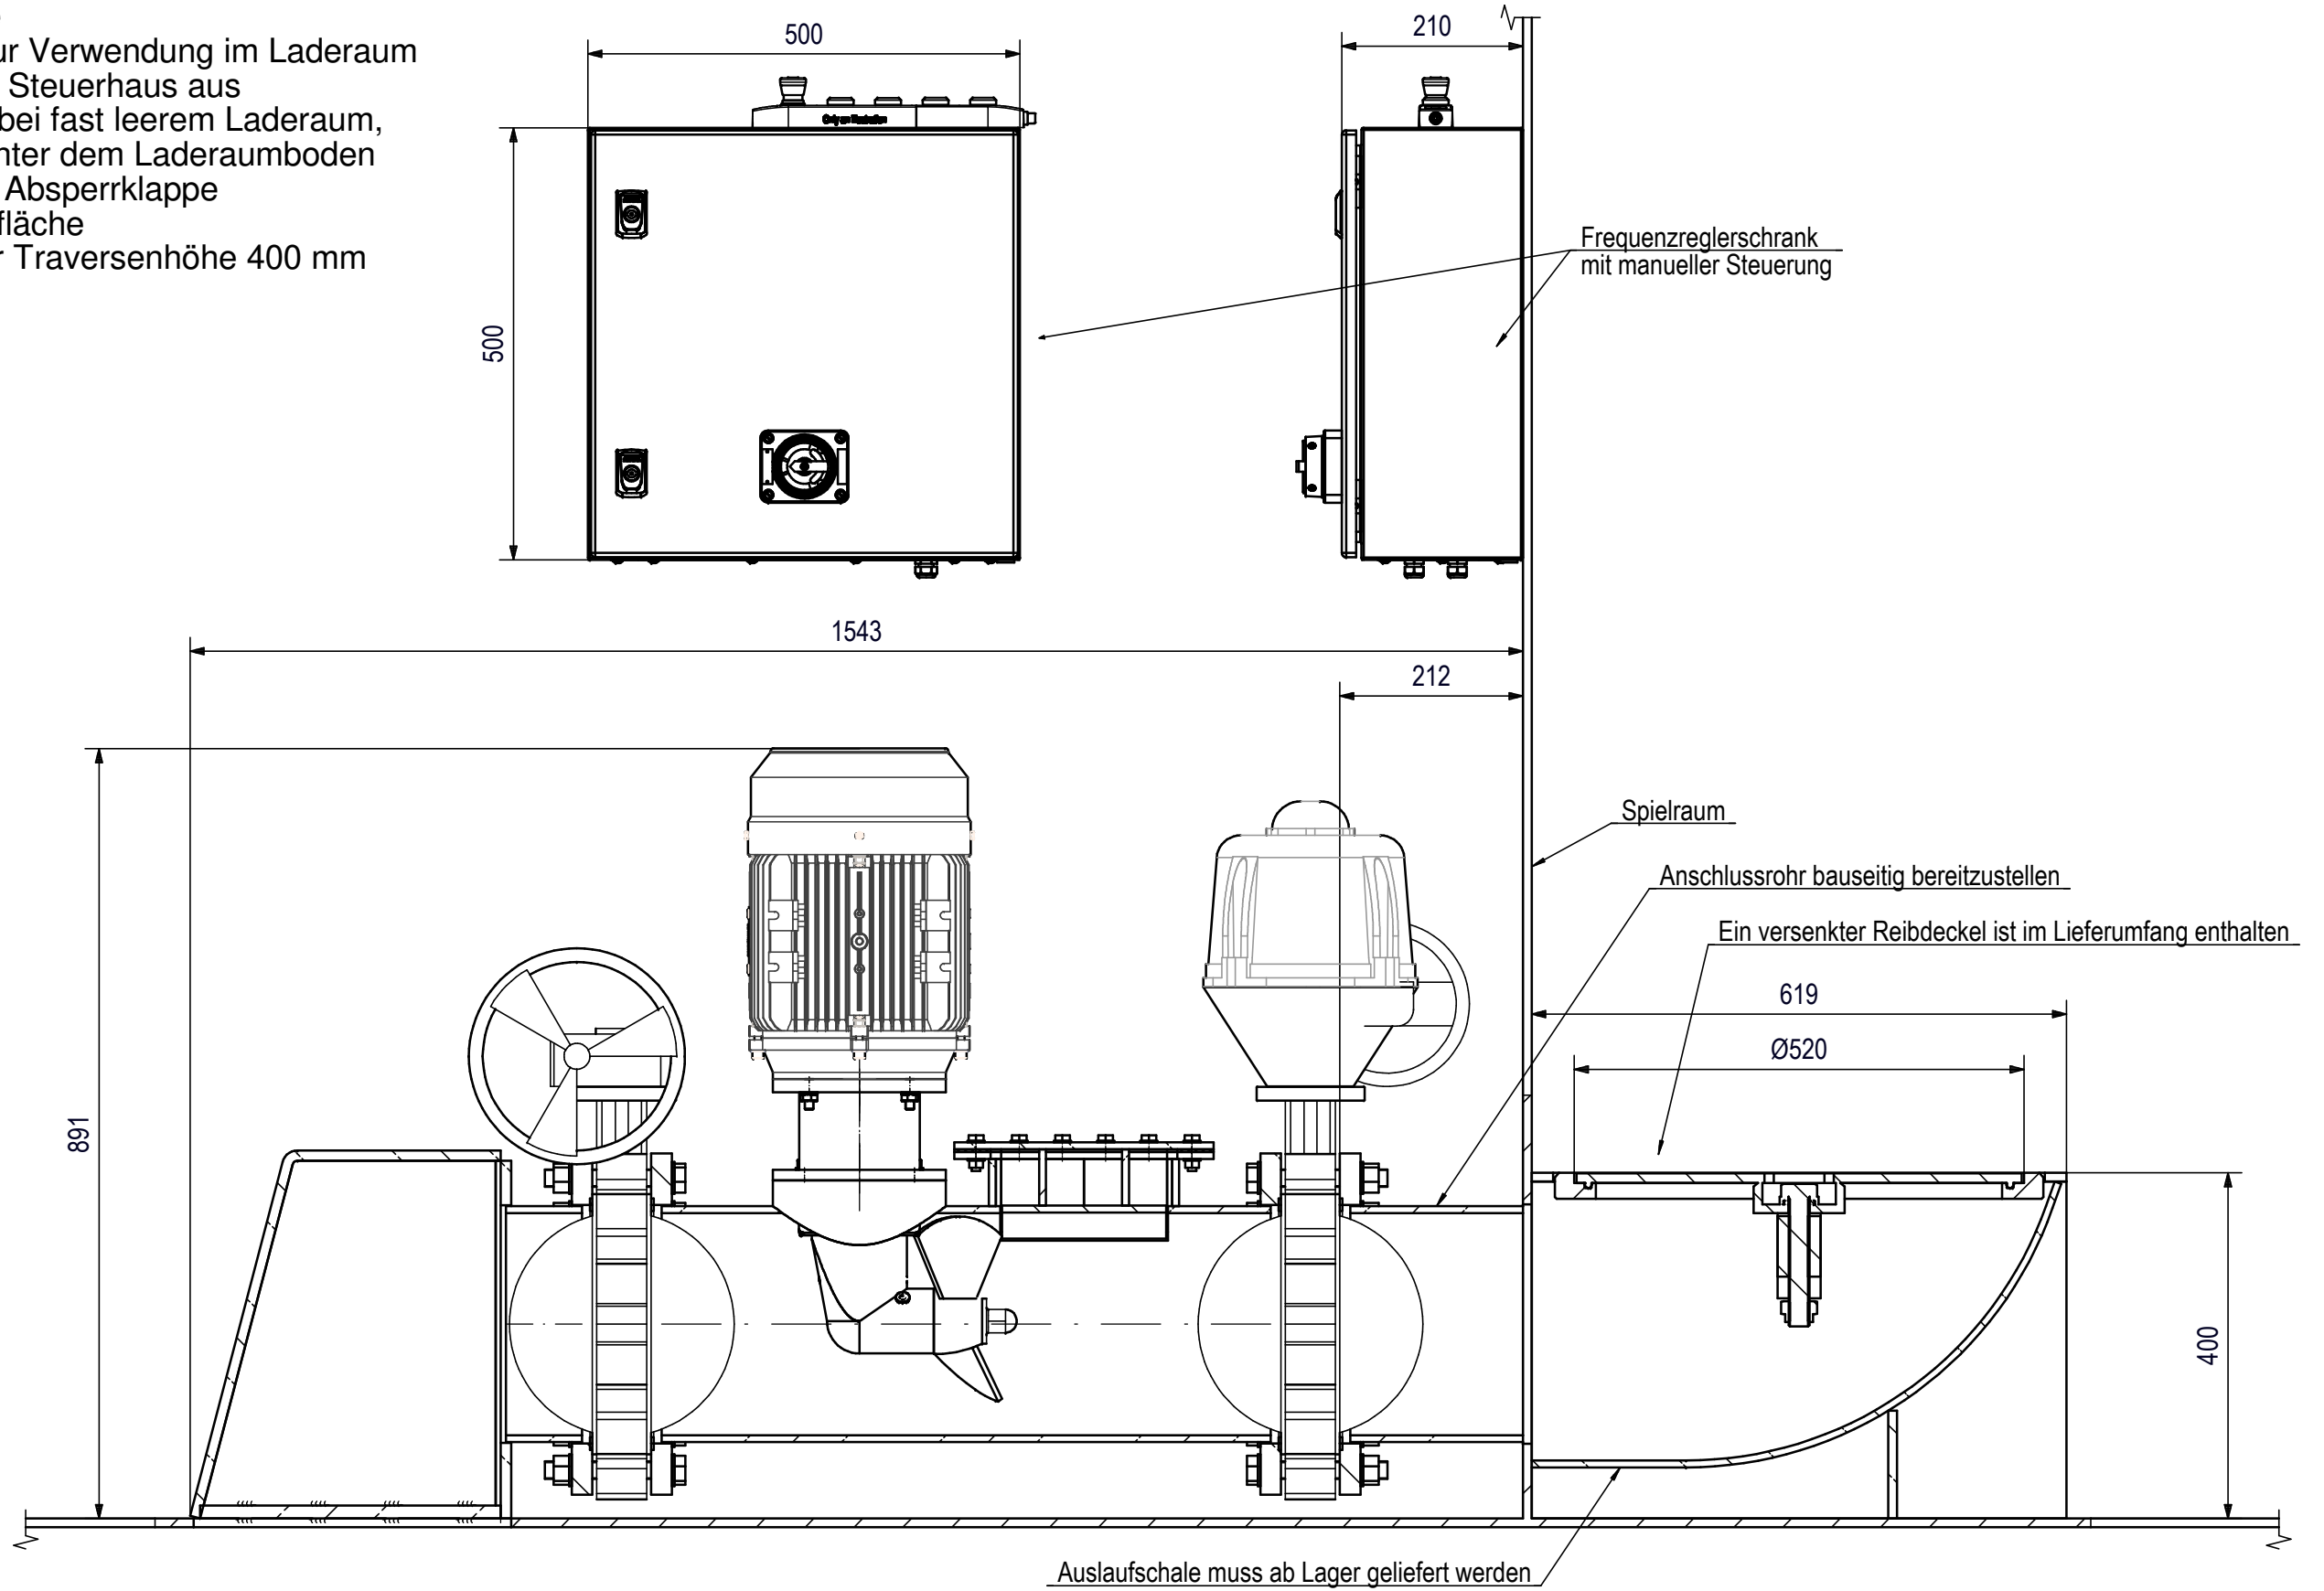


Auslaufschale muss ab Lager geliefert werden

	Grevelingenweg 23 3313 LB Dordrecht The Netherlands	Email: info@degrootmarine.com Phone: +31-3039700 Website: www.degrootmarine.com	Execution class: N/A	Dimensions tolerances: According ISO 2768-1
	3rd angle projection 	Overall scale: 1:8 Dimension unit: mm Layout format: A3	Signed by: J. Ippel 24-11-22 Approved by: Approved by:	Rev. A By: Jlp Date: 24-11-22 Revision comment: First issues
Drawing status: Only for information				Project: Drawingnr.: 35745001
Vesel:				Drawingsht.: 3 of 4

BALLASTPOMP TYPE PTD H250-7,5-10

- Kapazität 650 m³ / Stunde
- Standardfernbedienung zur Verwendung im Laderaum
- Optionale Bedienung vom Steuerhaus aus
- Hohe Saugleistung, auch bei fast leerem Laderaum, durch niedrigen Einbau unter dem Laderaumboden
- Manuelle oder elektrische Absperrklappe
- Schmutzgitter in der Oberfläche
- Rohreinbauhöhe unter der Traversenhöhe 400 mm

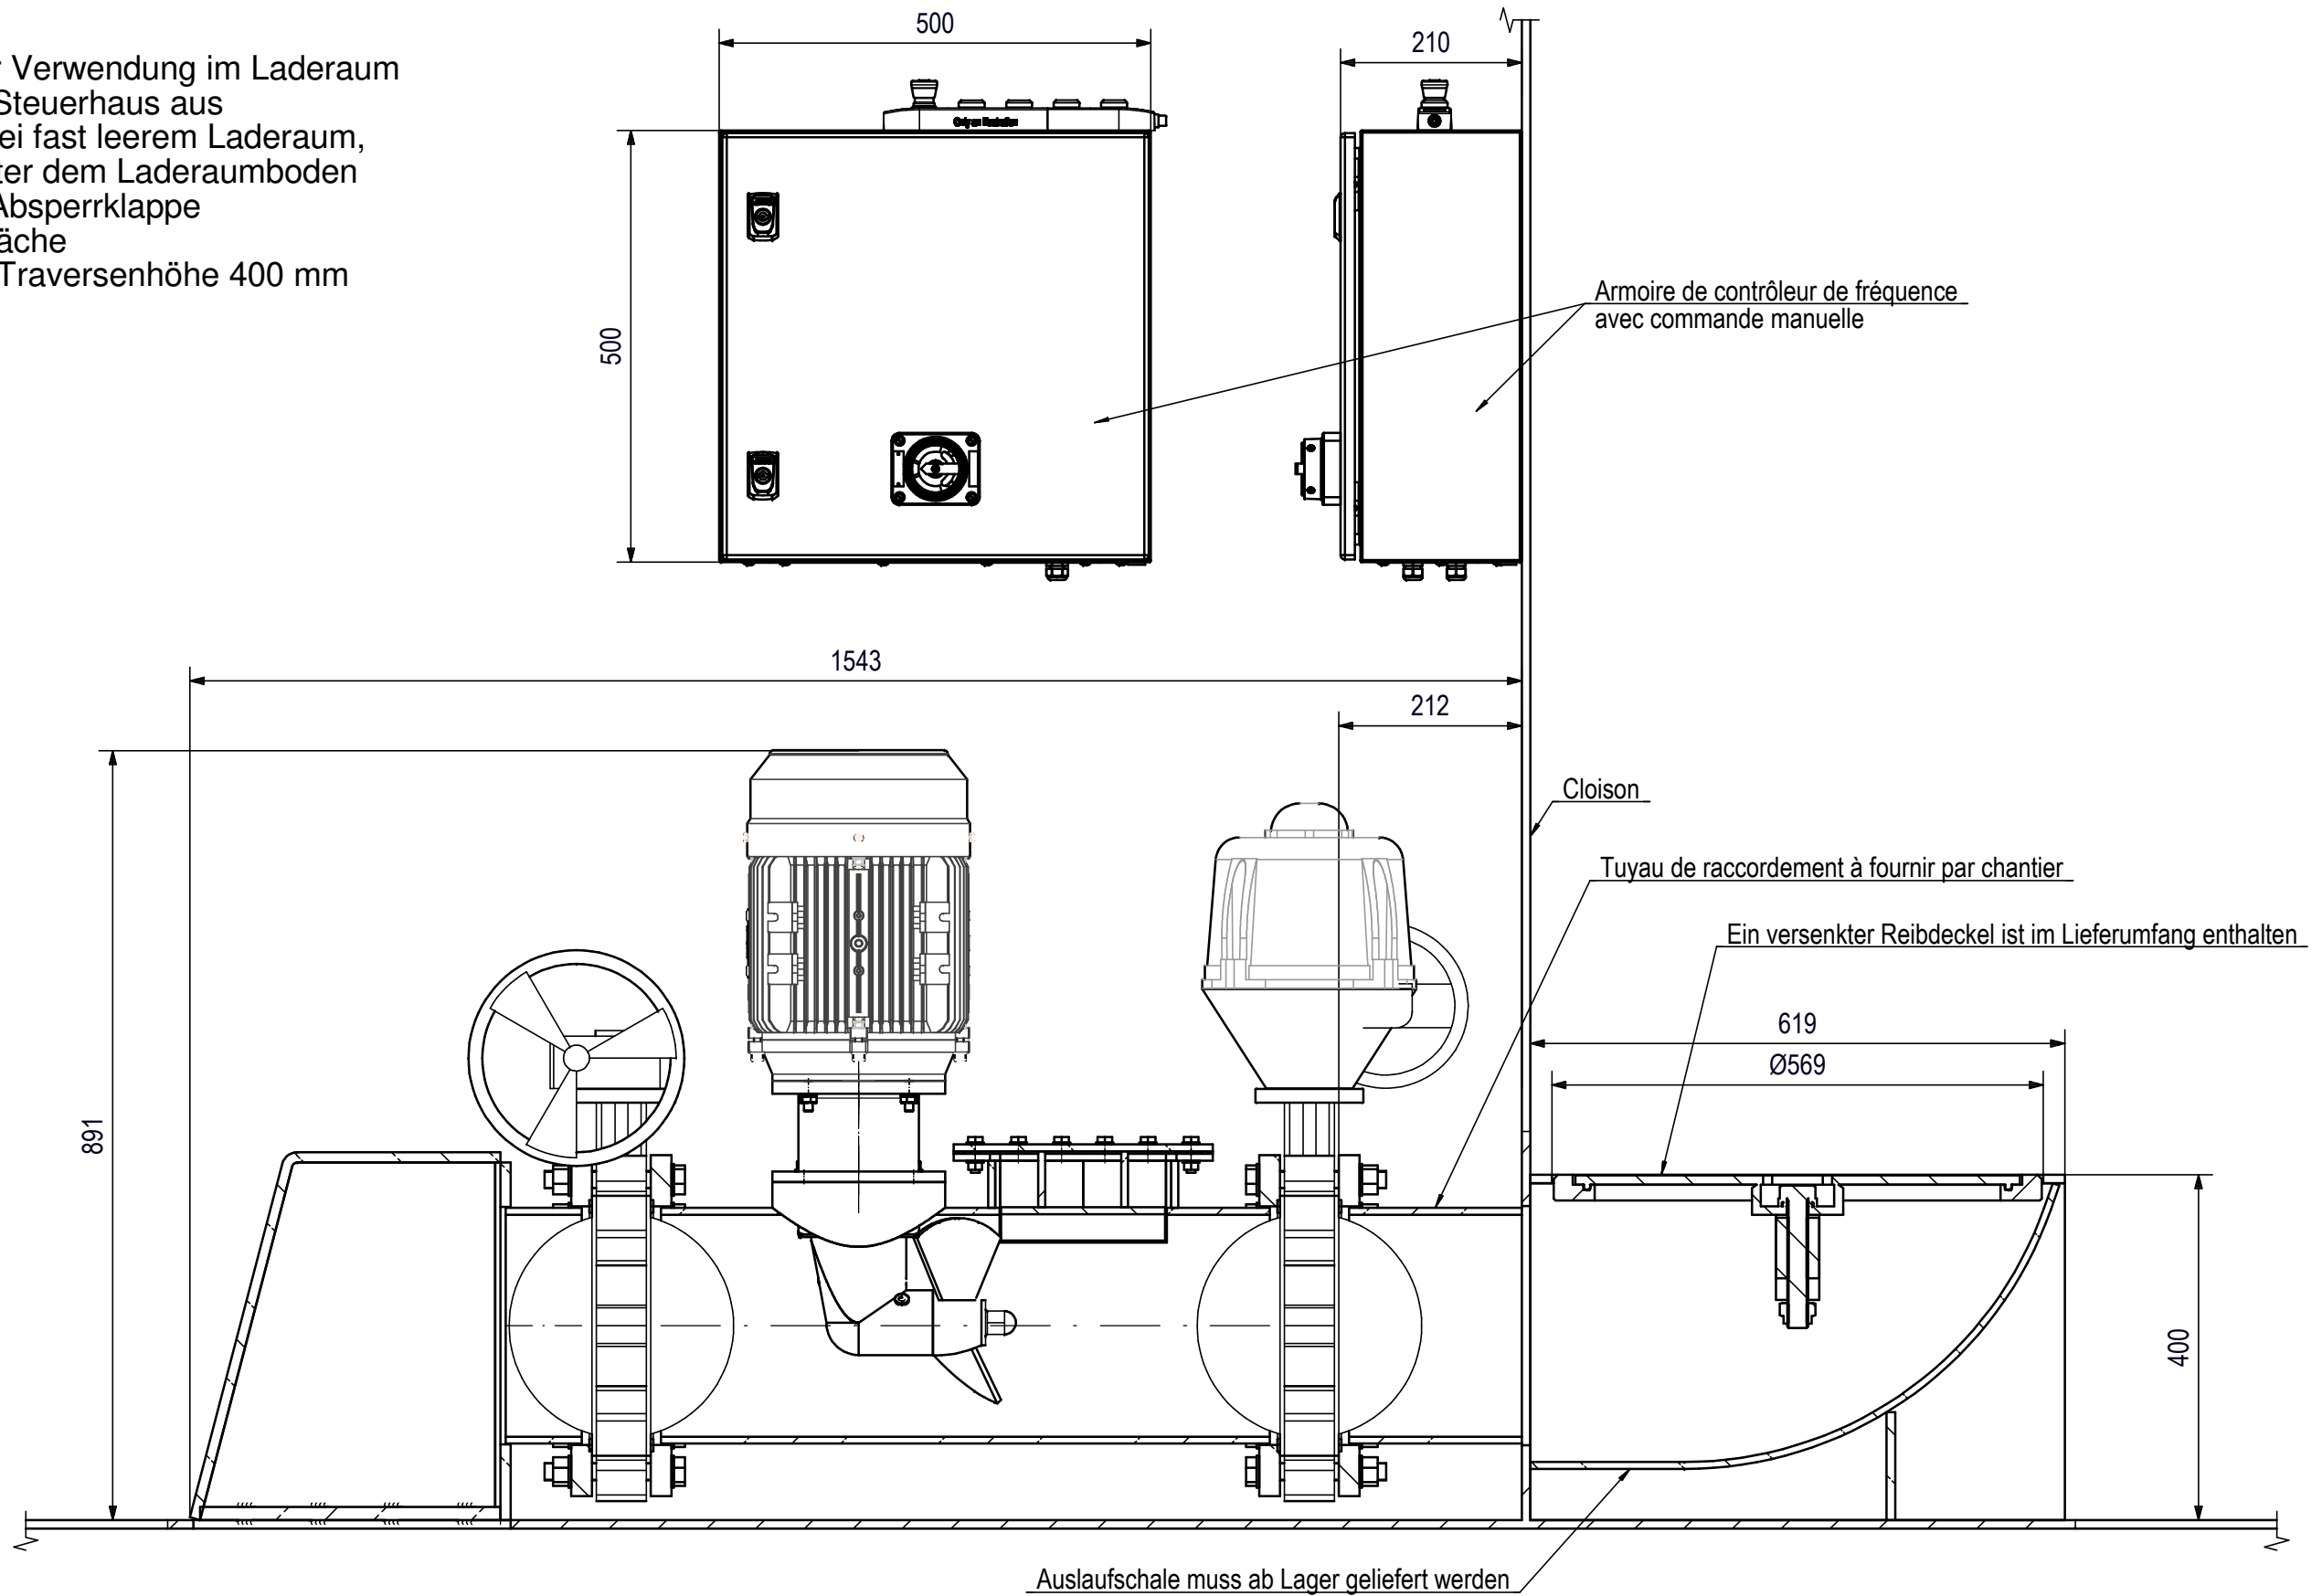

Auslaufschale muss ab Lager geliefert werden

	Grevelingenweg 23 3313 LB Dordrecht The Netherlands	Email: info@degrootmarine.com Phone: +31-3039700 Website: www.degrootmarine.com	Execution class: N/A	Dimensions tolerances: According ISO 2768-1
	3rd angle projection 	Overall scale: 1:8 Dimension unit: mm Layout format: A3	Signed by: J. Ippel 24-11-'22 Approved by: Approved by:	Rev. A By: Jlp Date: 24-11-'22 Revision comment: First issues
General notes:				Drawing status: Only for information Project: Drawingnr.: 35745001 Vesel: Drawingsht.: 4 of 4